

DYNAMIC CHECKWEIGHER CW-6K

- CW-6K check weigher is suitable for product weight range from 0.5-6kg.
- Weighing accuracy is within $\pm 2g$;
- 10-inch touch screen, can store over 1 million transaction, data export through USB;
- It is widely used for food, feeds, logistic industries, automation production line, and so on.

Multiple industrial application



Feeds



Logistic




Automation production line



0.5-6kg
Weighing range



$\pm 2g$
Accuracy



100 +Pcs/min
Speed




Standard specification

| | |
|---------------------------------|--|
| Model | CW-6K |
| Weighing range | 0.5~6kg |
| Scale division | 1g |
| Highest Accuracy(3 σ) * | $\pm 2g$ |
| Highest Weighing speed * | 100+pcs/min |
| Belt speed | 10~50m/min |
| Belt size | 500*400mm |
| Weighing platform Height ** | 750 \pm 50mm |
| Tested object size | Length100~420mm, Width50~400mm, Height50~400mm |
| Belt material | PU |
| Structure of the material | Carbon steel, SS304 for weighing platform |
| Alarm light | 3-color signal light (Red, yellow, green) |
| Display size | 10-inch color touch screen |
| Rejector lineup | Options: swing type, push type |
| Power | AC220V single phase, 50/60Hz, 850W |
| operating temperature | 0~40 $^{\circ}$ C |
| IP grade | IP54,IP65 Optional |

*Depend on the weight, size and material of test object.

Dimensions

Unit:mm

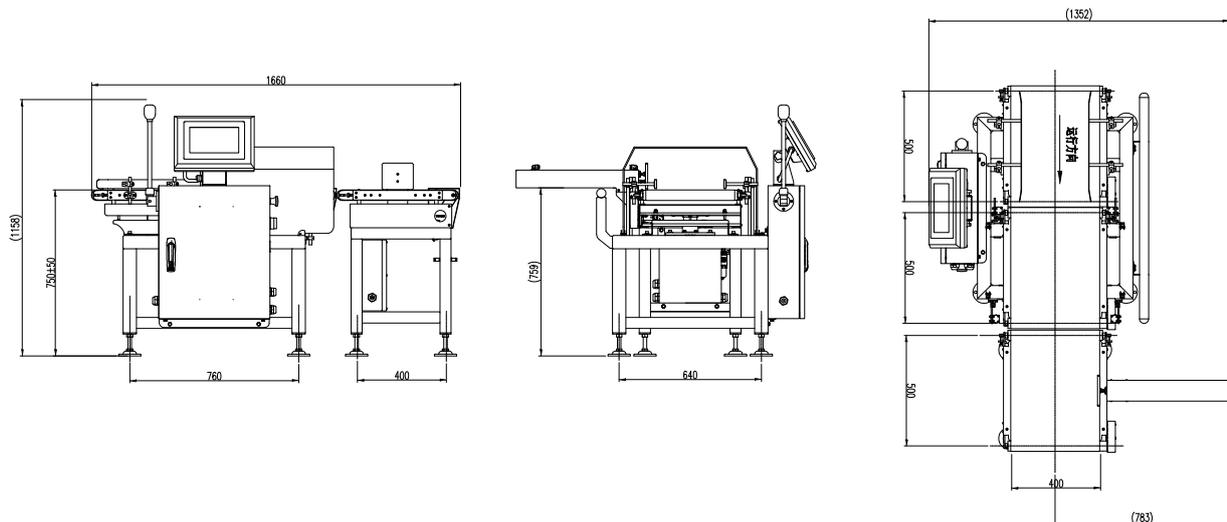

General Measure Technology Co.,Ltd.

Address: Room2208, Block A, Building 6, Shenzhen International Innovation Valley,
Nanshan District, Shenzhen, Guangdong Province, P.R.China.
Tel/Wechat: +86 185 6585 5789
E-mail: xjlv@szgmt.com
Website: www.gmweighing.com



LinkedIn



Facebook



Wechat